

Area: Outdoor Luminaires



Category: Linear lighting / decorative lighting / Cove



Mounting: Surface horizontal mounting / Surface vertical mounting / Wall mounting

xLine IP67 is a non-flexible waterproof linear LED light with opal encapsulation.

These IP67 waterproof NICHIA LED lights are designed for long-term professional lighting applications and perfectly suit for outdoor LED linear decorative, border lighting, cove lighting, edge lighting and many more applications.


For these waterproof IP67 linear LED lights we use the highest quality materials, NICHIA LEDs from Japan, current stabilization system inside. Encapsulated aluminum housing does not attract dust and dirt, it is easy to clean and is fully UV resistant. All of these features guarantee extra long lifetime and stable performance.

Powerful, versatile, robust, the xLine provides a reliable long-term lighting solution to lighting designers.

TECHNICAL DATA

Voltage	24 V
LED lumen maintenance	L90B10 > 60.000 h
Light engine	Any LED strip up to 19 W/m
Cover	Opal
Housing color	● Black, ○ White, ● Grey, ● Custom
Control	Dimmable






DIMENSIONS


LUMINAIRE

One cable, two endcaps

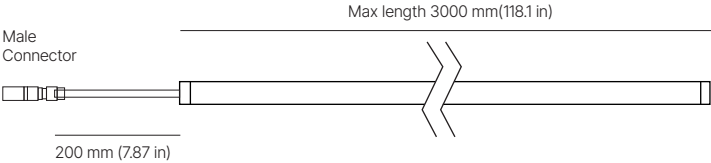


START

Two cables, endcap at the start

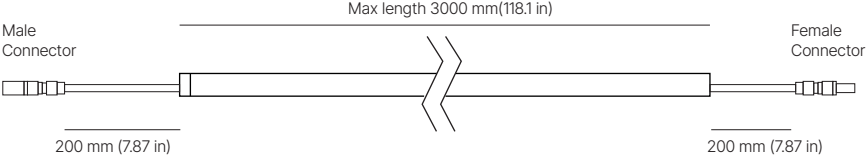


MIDDLE

Two cables, no endcaps

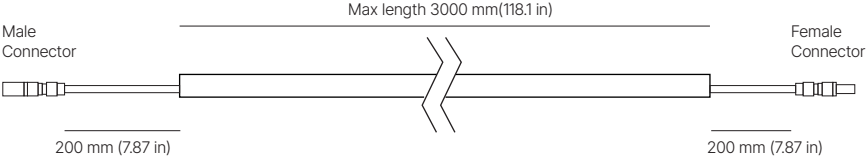


END

One cable, endcap at the end

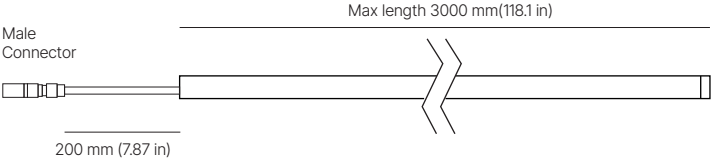

FULL MODULE

Two cables, two endcaps

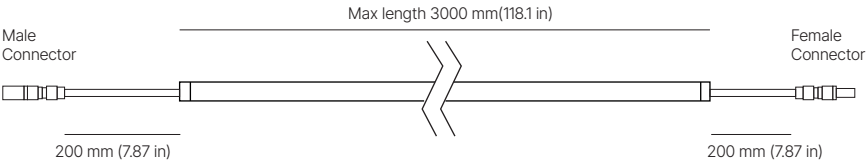

Final length of the luminaire calculated:


L = C x N + E;

- L = Luminaire length
- C = Cutting Step
 - White 24V: 125 mm (4.9 in)
 - White 48V: 250mm (9.8 in)
 - TW: 125m (4.9 in)
 - RGB: 125mm (4.9 in)
- N = Quantity Of Segments. 2 < N < 72;


Note: Length tolerance +-3mm/m (0.11 in)

CONNECTION TYPES


INDIVIDUAL module

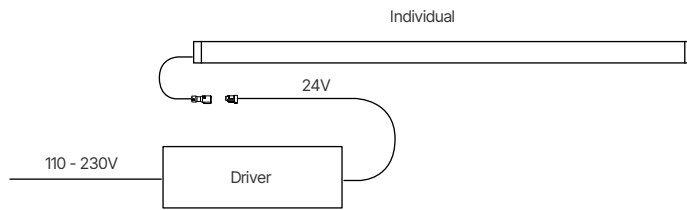

FULL module

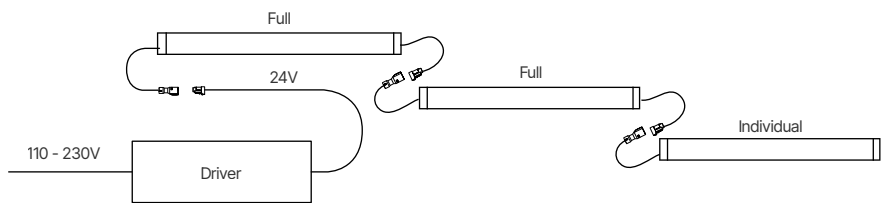


CONTINUOUS LINE module

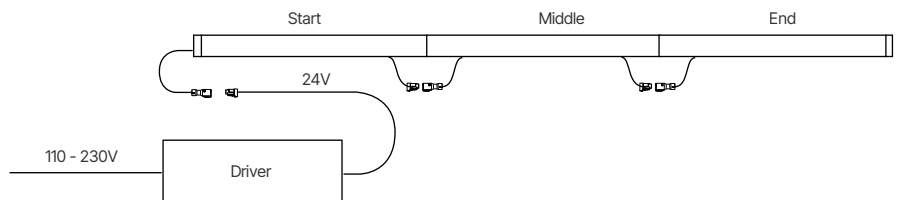



OUTDOOR CONNECTORS

J1X MALE CONNECTORS



For white





For tunable white



For RGB




For RGBW





J1X FEMALE CONNECTORS



For white





For tunable white



For RGB



For RGBW



WIRES



3,6 mm
(0.14 in)



5,4 mm
(0.21 in)



7,2 mm
(0.28 in)



9 mm
(0.5 in)

1,8 mm
(0.07 in)

WIRE LENGTHS AVAILABLE

CODE	L30	L100	L1000	L2000	L10000
LENGHT	30mm 0ft 1in	100mm 3.9 in	1000mm 3ft 3in	2000mm 6ft 6in	10000mm 32ft 10in

LUMENS

White

SPECTRUM	CRI	lm/m (lm/ft)	POWER				
			2.4W/m (0.73W/ft)	4.8W/m (1.5W/ft)	9.6W/m (2.9W/ft)	14.4W/m (4.38W/ft)	18.2W/m (5.5W/ft)
820/822/825/827/830/ 835/840/850/865	CRI 80+	lm/m (lm/ft)	49-77 (15-23)	101-152 (31-46)	203-298 (62-91)	300-439 (91-134)	373-549 (114-167)
920/922/925/T927/T930/ T935/T940/T950/T965	CRI 90+tri	lm/m (lm/ft)	43-75 (13-23)	85-148 (26-45)	165-291 (50-87)	241-430 (73-131)	299-537 (91-164)
027/030/035/040/050	CRI 95+	lm/m (lm/ft)	49-56 (15-17)	98-111 (30-34)	191-217 (58-66)	280-318 (85-97)	347-396 (106-121)
EFFICACY (lm/W)			31	32	31	31	31

TUNABLE

SPECTRUM	CRI	lm/m (lm/ft)	POWER	
			9.6W/m (2.9W/ft)	19.2W/m (5.9W/ft)
820/865 825/857 827/857 827/850	CRI 80+	lm/m (lm/ft)	248-296 (76-90)	500-588 (152-179)
920/T965 925/T957 T927/T950	CRI 90+tri	lm/m (lm/ft)	211-257 (64-78)	414-506 (126-154)
EFFICACY (lm/W)			31	31

RGB

SPECTRUM	COLOR	lm/m (lm/ft)	POWER	
			7.2W/m (2.2W/ft)	11.52W/m (3.5W/ft)
TOTAL			63 (19)	96 (29)
EFFICACY (lm/W)			9	13

RGBW

SPECTRUM	CRI	lm/m (lm/ft)	POWER		
			9.6W/m (2.9W/ft)	14.4W/m (4.4W/ft)	19.2W/m (5.9W/ft)
822 / 825 / 827 / 830 835 / 840 / 850 / 865	CRI 80+	lm/m (lm/ft)	109-129 (33-39)	160-189 (49-58)	248-303 (76-92)
922 / T927 / T930 / T935 T940 / T950 / T965	CRI 90+tri	lm/m (lm/ft)	103-127 (31-39)	150-186 (46-57)	220-298 (67-91)
EFFICACY (lm/W)			13	13	13

TECHNICAL SPECIFICATIONS

SERTIFICATIONS



UL approved



Made in Europe



L90B10
60.000 hours



CE compliant



5- year warranty



NICHIA LEDs



KEY BENEFITS



IP67



UV, salt & solvent resistant



Wide 2000K-6500K white color range



Thermal resistance:
-25° – +50°



Stabilized current design



24V DC voltage input



3-step MacAdam LEDs



Control sold separately; DALI, Casambi, 1- 10V, Phase Cut



Available in any 0.5-3m length



CRI 80 + CRI 90+tri



Beam angle: 113°



Continuous line light effect without dark spots



Customization for your project




External driver



Reverse voltage protection


MAX RUN

Possible max length connected to driver from single side.

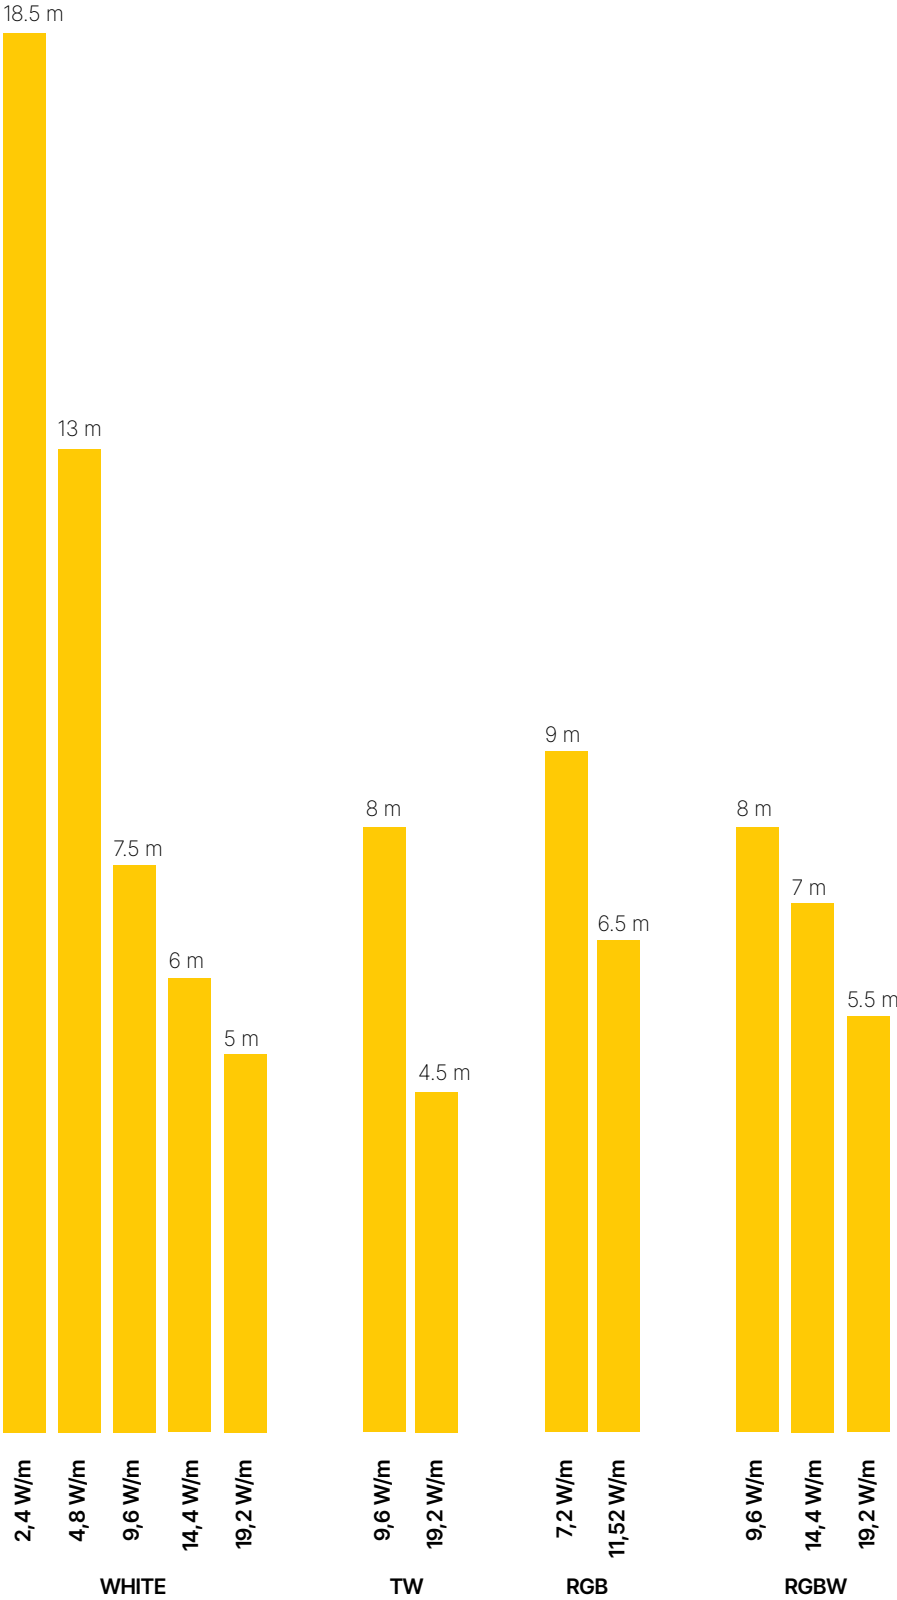


OPTICS

xLine IP
LOR 20%



ORDER CODE

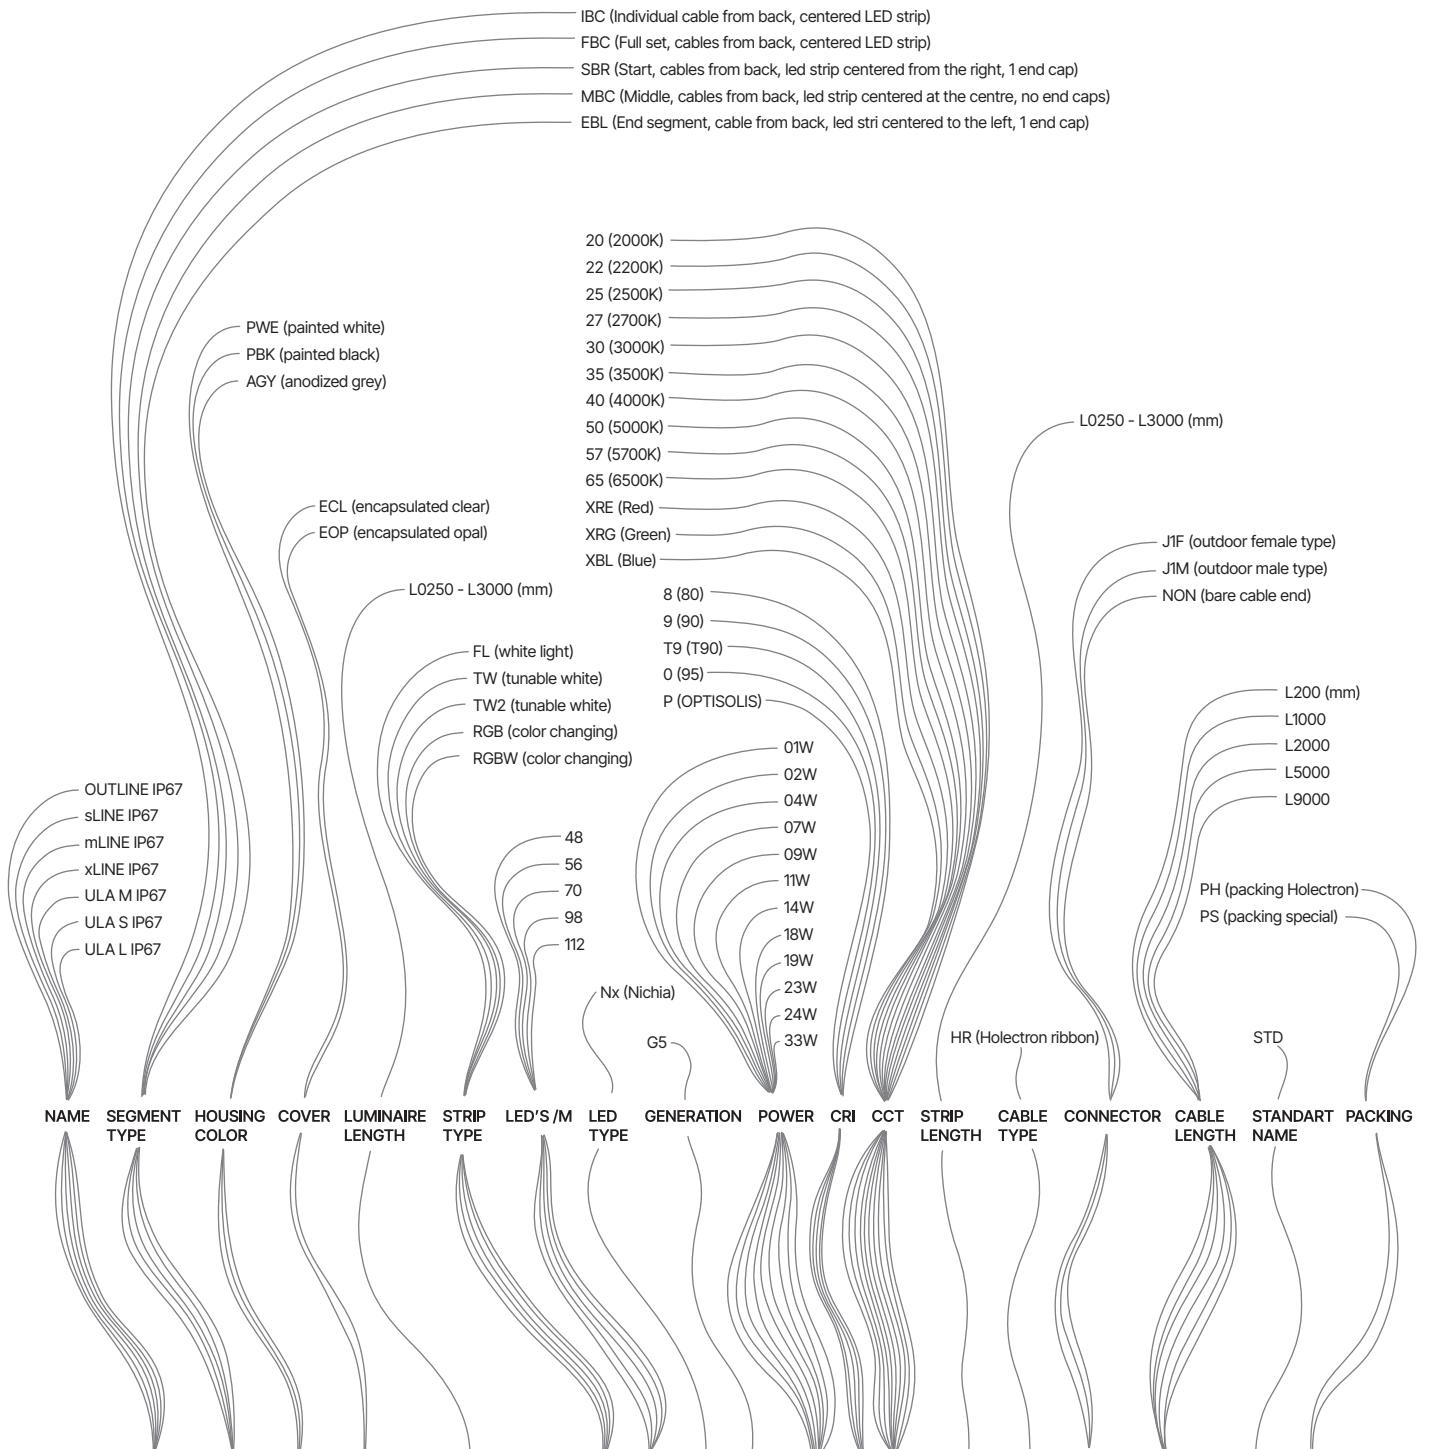

- IBC (Individual cable from back, centered LED strip)
- FBC (Full set, cables from back, centered LED strip)
- SBR (Start, cables from back, led strip centered from the right, 1 end cap)
- MBC (Middle, cables from back, led strip centered at the centre, no end caps)
- EBL (End segment, cable from back, led stri centered to the left, 1 end cap)
- PWE (painted white)
- PBK (painted black)
- AGY (anodized grey)
- ECL (encapsulated clear)
- EOP (encapsulated opal)
- L0250 - L3000 (mm)
- FL (white light)
- TW (tunable white)
- TW2 (tunable white)
- RGB (color changing)
- RGBW (color changing)
- 48
- 56
- 70
- 98
- 112
- Nx (Nichia)
- G5
- 20 (2000K)
- 22 (2200K)
- 25 (2500K)
- 27 (2700K)
- 30 (3000K)
- 35 (3500K)
- 40 (4000K)
- 50 (5000K)
- 57 (5700K)
- 65 (6500K)
- XRE (Red)
- XRG (Green)
- XBL (Blue)
- 8 (80)
- 9 (90)
- T9 (T90)
- 0 (95)
- P (OPTISOLIS)
- 01W
- 02W
- 04W
- 07W
- 09W
- 11W
- 14W
- 18W
- 19W
- 23W
- 24W
- 33W
- HR (Holectron ribbon)
- L0250 - L3000 (mm)
- J1F (outdoor female type)
- J1M (outdoor male type)
- NON (bare cable end)
- L200 (mm)
- L1000
- L2000
- L5000
- L9000
- PH (packing Holectron)
- PS (packing special)
- STD

NAME SEGMENT HOUSING COVER LUMINAIRE STRIP LED'S /M LED GENERATION POWER CRI CCT STRIP CABLE CONNECTOR CABLE STANDART PACKING







TYPE COLOR LENGTH TYPE TYPE TYPE TYPE TYPE TYPE TYPE TYPE TYPE TYPE TYPE NAME


A018N IEC AGY EOP L1011(3'4'')/FL175/Nx G4 14W 830 L1000 HR J1x L0200 STD PH

APPLICATIONS



SURFACE HOLDERS

CODE	DESCRIPTION
PRG.A019x.F01.GZK	Metal spring
	
PRG.A017x.PRT.00006	Metal holder
	
PRG.A017x.PRT.02	Metal holder
	
PRG.A017x.PRT.00004	Metal holder
	
PRG.A016x.PRT.00001	Suspension kit
	
PRG.A016x.F06	Metal holder rotatable
	
PRG.A016x.F05	Metal holder
	
PRG.A015x.F04.RWE	Plastic holder
	



POWER SUPPLY - INDOOR

Item No: DRI.V24.ILS.FO.SE.00001
Description: Power supply 100W 120 - 227 VAC 5 - year warranty
Color: Static White
Voltage: 24V DC
Control: FO
Certification: CE, UL listed

POWER SUPPLY - OUTDOOR

Item No: DRI.V24.OCO.FO.TR.00030
Description: Power supply 96W 24V 90 - 305 VAC 5 - year warranty
Color: Static White
Voltage: 24V DC
Control: FO
Certification: CE, UL listed