



Area: Indoor Luminaires



Category: Linear lighting / decorative lighting / Cove



Mounting: Surface horizontal mounting / Surface vertical mounting / Wall mounting

Ula M is a modular linear LED light with a opal cover designed for long-term indoor professional lighting applications.


These Ula M modular LED lights are fitted with the highest quality NICHIA LEDs, with a wide range of Color rendering index (CRI) and Color temperature (CCT) options to choose from. NICHIA LEDs guarantees highest quality lighting and super-high efficacy. This LED strip is available with 3 Step MacAdam or Single Bin LEDs. Opal cover ensures continuous light effect without dark spots.

Integrated connectors are hidden inside each module. This provides for discrete, straight-forward and reliable module connection to create a seamless line of lighting.

TECHNICAL DATA

Voltage	24 V
LED lumen maintenance	L90B10 > 60.000 h
Light engine	Any LED strip up to 19 W/m
Cover	Opal / Clear (available on request)
Housing color	● Black, ○ White, ● Grey, ● Custom
Control	Dimmable






DIMENSIONS


LUMINAIRE

One cable, two endcaps

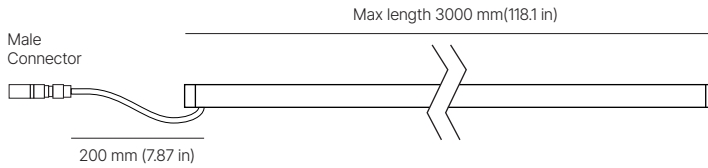


START

Two cables, endcap at the start

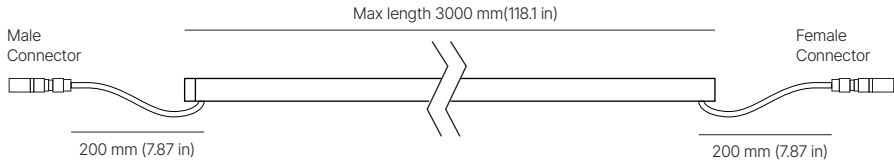


MIDDLE

Two cables, no endcaps

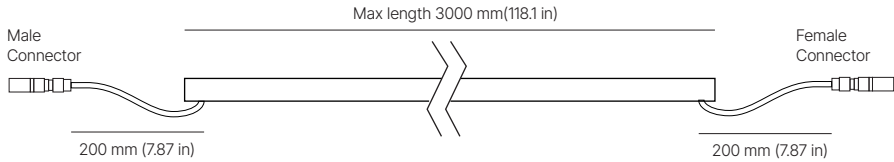


END

One cable, endcap at the end

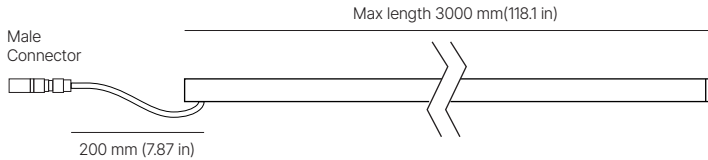

FULL MODULE

Two cables, two endcaps

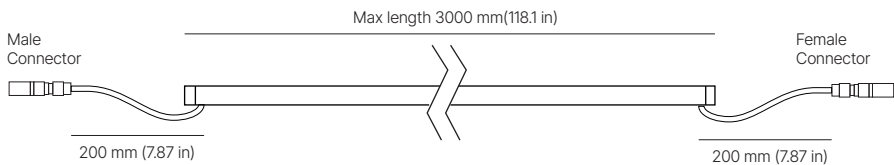

Final length of the luminaire calculated:

$L = C \times N + 10\text{mm (0.39 in)}$;


- L = Luminaire length
- C = Cutting Step
 - White 24V: 125 mm (4.9 in)
 - White 48V: 250mm (9.8 in)
 - TW: 125m (4.9 in)
 - RGB: 125mm (4.9 in)
- N = Quantity Of Segments. $2 < N < 72$

- E = Exit cable
 - Individual - 6mm (0.23 in)
 - Start - 4mm (0.16 in)
 - Middle - 2mm (0.08 in)
 - End - 4mm (0.16 in)
 - Full set - 6mm (0.23 in);


Note: Length tolerance +-3mm/m (0.11 in)

CONNECTION TYPES


INDIVIDUAL module

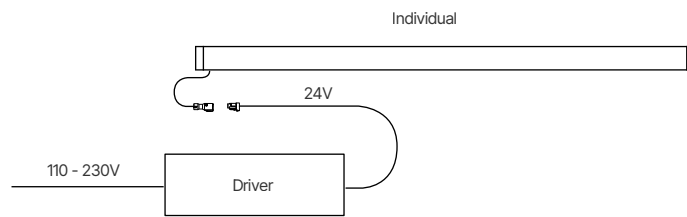

FULL module

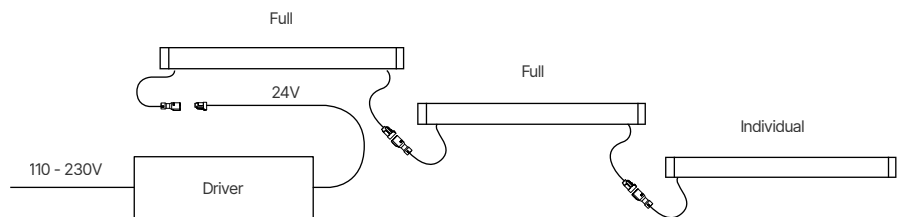

CONTINUOUS LINE module (for OUTDOOR OPAL ONLY)

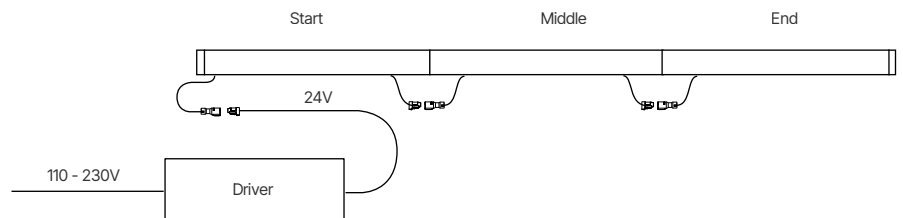

CONNECTORS & WIRES

INDOOR

PIX - MALE CONNECTORS

For white




6,7 mm
(0.26 in)

For RGB



11,7 mm
(0.46 in)

5 mm
(0.2 in)



15,5 mm
(0.61 in)

5 mm
(0.2 in)

PIX - FEMALE CONNECTORS




6,1 mm
(0.24 in)



11,1 mm
(0.43 in)

5 mm
(0.2 in)



15 mm
(0.59 in)

5 mm
(0.2 in)

WIRES



3,6 mm
(0.14 in)



7,2 mm
(0.28 in)

1,8 mm
(0.07 in)

WIRE LENGTHS AVAILABLE

CODE	L30	L100	L1000	L2000	L10000
LENGHT	30mm	100mm	1000mm	2000mm	10000mm
	0ft 1in	3.9 in	3ft 3in	6ft 6in	32ft 10in

LUMENS

White

SPECTRUM	CRI	lm/m (lm/ft)	POWER			
			4.8W/m (1.46W/ft)	9.6W/m (2.9W/ft)	14.4W/m (4.38W/ft)	19.2W/m (5.84W/ft)
820/822/825/827/830/ 835/840/850/865	CRI 80+	lm/m (lm/ft)	235-365 (72-111)	481-724 (146-220)	728-1076 (222-328)	970-1422 (295-433)
920/922/925/T927/T930/ T935/T940/T950/T965	CRI 90+tri	lm/m (lm/ft)	204-356 (62-108)	403-706 (123-215)	597-1050 (182-320)	786-1380 (239-423)
027/030/035/040/050	CRI 95+	lm/m (lm/ft)	236-266 (72-81)	467-528 (142-161)	693-786 (211-239)	912-1036 (278-315)
EFFICACY (lm/W)			58	57	57	57

RGB

COLOR	lm/m (lm/ft)	POWER		
		7.2W/m (2.2W/ft)	11.52W/m (3.5W/ft)	14.4W/m (4.38W/ft)
Total	lm/m (lm/ft)	152(46)	230(70)	228(88)
EFFICACY (lm/W)		20	21	21

TECHNICAL SPECIFICATIONS

SERTIFICATIONS



UL approved



Made in Europe



L90B10
60.000 hours



CE compliant



5- year warranty



NICHIA LEDs



KEY BENEFITS



Thermal resistance:
-25° – +50°



Stabilized current design



Wide 2000K-6500K white color range



3-step MacAdam LEDs



Control sold separately;
DALI, Casambi,
1- 10V, Phase Cut



24V DC voltage input



CRI 80 +
CRI 90+tri
CRI 95+



Beam angle: 113°



Available in any 0.5-3m length



Customization for your project



External driver




Continuous line light effect without dark spots



Reverse voltage protection


MAX RUN

Possible max length connected to driver from single side.

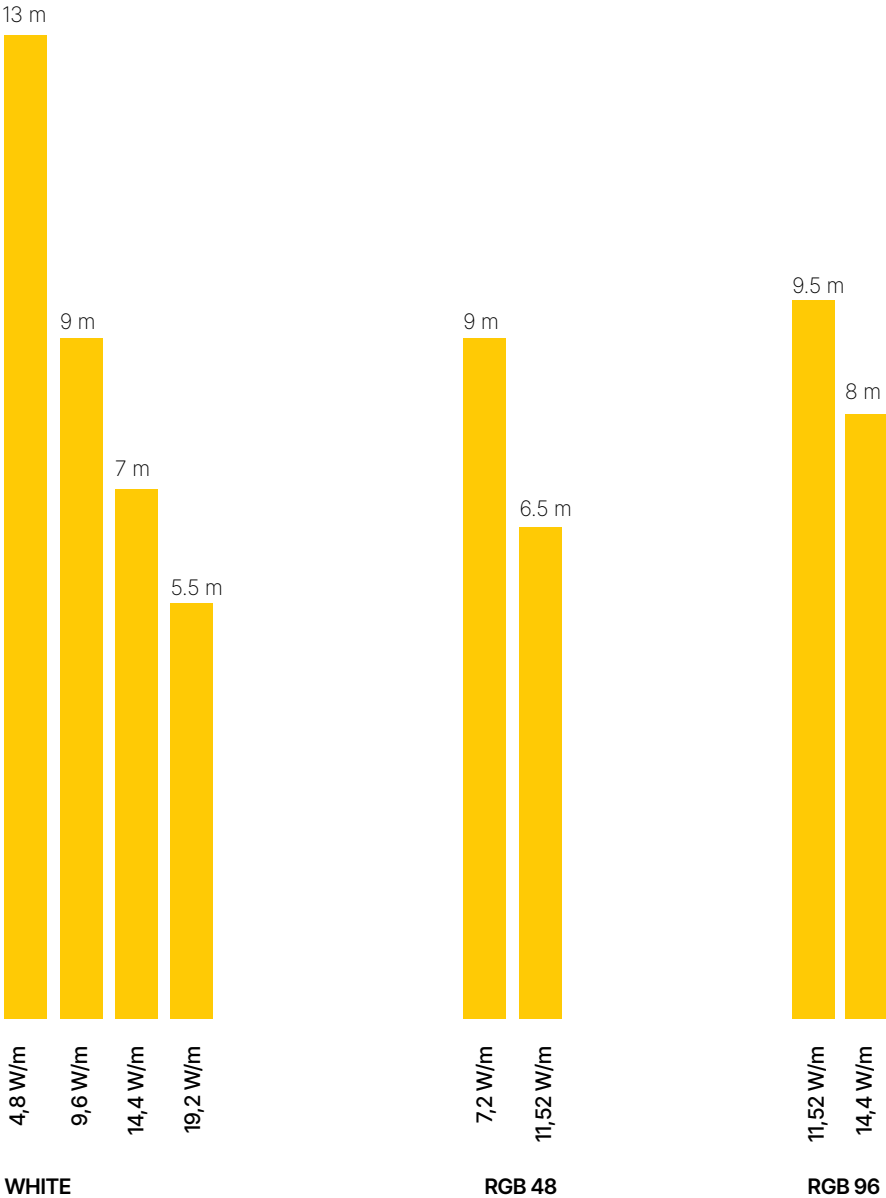


OPTICS

ULAM
LOR 39%




ORDER CODE

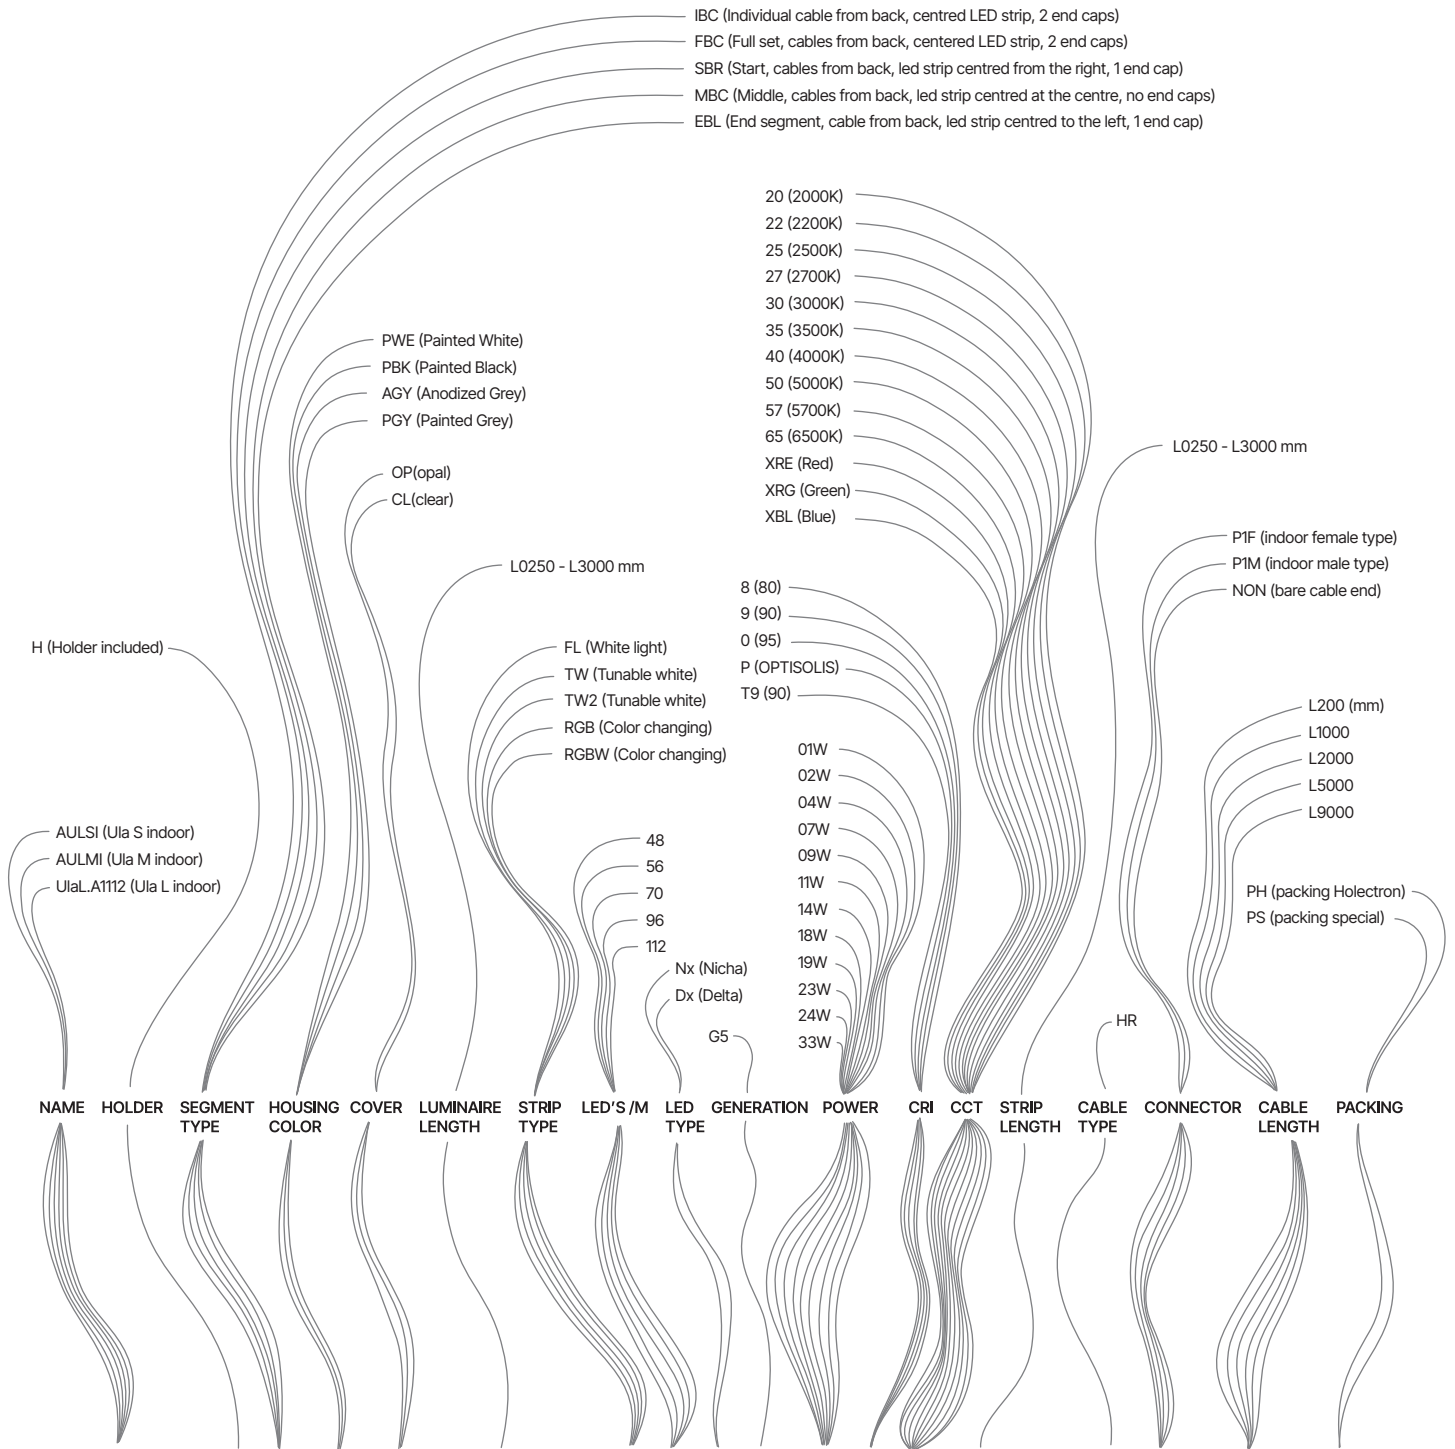

UlaL.A1112.H IBC PGY OPL L1008(3'4'') / FL112/Nx G5 19W T930 L1000 NC / HR.P1F.L00030 / PH

ORDER CODE EXAMPLE

APPLICATIONS


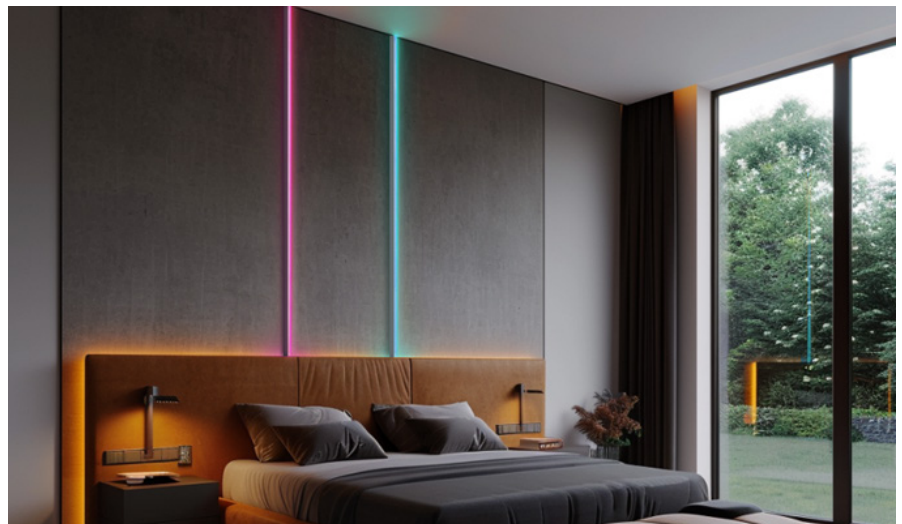


SURFACE HOLDERS

CODE

DESCRIPTION

PRG.AULSI.F01.GZK



Metal holder

POWER SUPPLY - INDOOR



Item No: DRI.V24.ILS.FO.SE.00001
Description: Power supply 100W 120 - 227 VAC 5 - year warranty
Color: Static White
Voltage: 24V DC
Control: FO
Certification: CE, UL listed