





FL112/NX G5 04W 825 48V

White LED strips

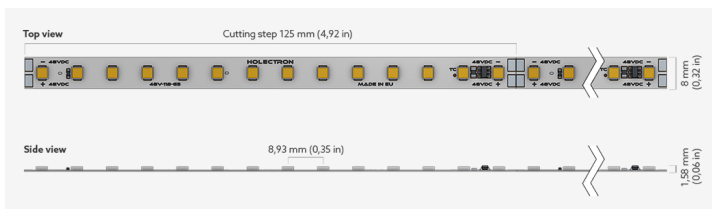

| | |
|--------------------------|----------------------|
| LIGHT TYPE | White |
| LEDs/M | 112 LEDs/m |
| CCT | 2500K |
| CRI | CRI 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | 120° beam angle |
| LUMINOUS FLUX | 581 Lm/m (177 Lm/ft) |
| EFFICACY | 121 Lm/W |
| LIFETIME | L90B10 60 000 |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|--------------------|
| VOLTAGE | 48-50 VDC |
| WATTAGE | 4.8 W/m 1.5 W/ft |

| | |
|---------------------|--|
| CUTTING STEP | 125 mm (4.92") |
| MAX RUN | 32.5 m (107') |
| PACKING | 10 m, 50 m or customized length per reel |
| DIMENSIONS | Width: 8 mm Height: 1.58 mm (0.06") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |
| STORAGE TEMP. | -25°C...+80°C (-13°F...176°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.