



# RGBW48/DX G5 014W 827

RGB+W LED strips

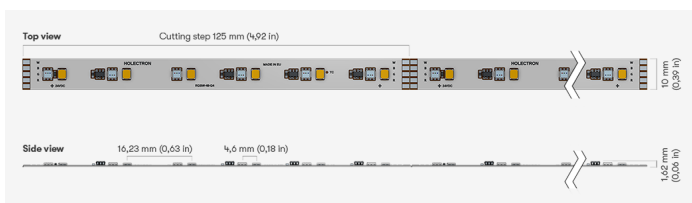

<b>LIGHT TYPE</b>	RGBW
<b>LEDs/M</b>	48 LEDs/m
<b>CCT</b>	2700K
<b>CRI</b>	CRI 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>PHOTOMETRIC</b>	120° beam angle
<b>LUMINOUS FLUX</b>	Total: 851 Lm/m (259 Lm/ft) White LED only: 401 Lm/m (122 Lm/ft) RGB LED only: 450 Lm/m (137 Lm/ft)
<b>EFFICACY</b>	59 Lm/W
<b>LIFETIME</b>	L70B50 50.000 h

<b>CONTROL</b>	Dimmable
----------------	----------

<b>VOLTAGE</b>	24 VDC
<b>WATTAGE</b>	14.4 W/m   4.39 W/ft

<b>CUTTING STEP</b>	125 mm (4.92")
<b>MAX RUN</b>	7 m (23')
<b>PACKING</b>	10 m, 50 m or customized length per reel
<b>DIMENSIONS</b>	Width: 10 mm Height: 1.58 mm (0.06")

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
<b>OPERATING TEMP.</b>	-25°C...+50°C ( -13°F...122°F )



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.