



RGBW48/DX G5 014W 835

RGB+W LED strips

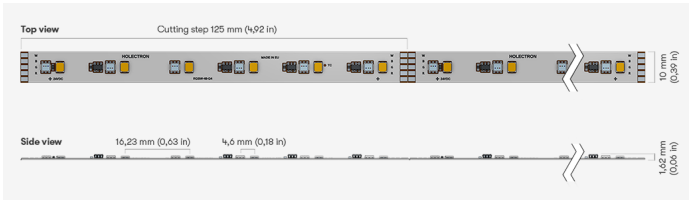

LIGHT TYPE	RGBW
LEDs/M	48 LEDs/m
CCT	3500K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	Total: 883 Lm/m (269 Lm/ft) White LED only: 433 Lm/m (132 Lm/ft) RGB LED only: 450 Lm/m (137 Lm/ft)
EFFICACY	61 Lm/W
LIFETIME	L70B50 50.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	14.4 W/m 4.39 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	7 m (23')
PACKING	10 m, 50 m or customized length per reel
DIMENSIONS	Width: 10 mm Height: 1.58 mm (0.06")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.