



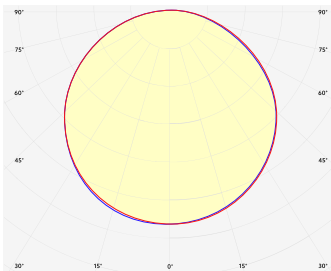

## TW70/NX G5 09W 820/822

Tunable white LED strips

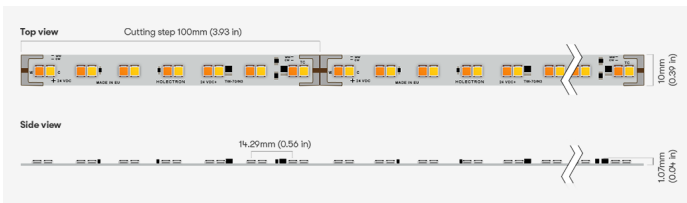

|                          |                         |
|--------------------------|-------------------------|
| <b>LIGHT TYPE</b>        | Tunable white           |
| <b>LEDs/M</b>            | 70 LEDs/m               |
| <b>CCT</b>               | Warm: 2000K Cold: 2200K |
| <b>CRI</b>               | Warm: 80+ Cold: 80+     |
| <b>COLOR CONSISTENCY</b> | 3-Step MacAdam          |
| <b>PHOTOMETRIC</b>       | 120° beam angle         |
| <b>LUMINOUS FLUX</b>     | 1035 Lm/m (315 Lm/ft)   |
| <b>EFFICACY</b>          | 108 Lm/W                |
| <b>LIFETIME</b>          | L90B10 60.000 h         |

|                |          |
|----------------|----------|
| <b>CONTROL</b> | Dimmable |
|----------------|----------|

|                |                     |
|----------------|---------------------|
| <b>VOLTAGE</b> | 24 VDC              |
| <b>WATTAGE</b> | 9.6 W/m   2.93 W/ft |

|                     |  |
|---------------------|--|
| <b>CUTTING STEP</b> | 100 mm (3.94")                           |
| <b>MAX RUN</b>      | 9 m (30')                                |
| <b>PACKING</b>      | 10 m, 50 m or customized length per reel |
| <b>DIMENSIONS</b>   | Width: 8 mm<br>Height: 1.58 mm (0.06")   |

|                        |                                 |
|------------------------|---------------------------------|
| <b>TEMPERATURE</b>     | Tc max <75°C ( 167°F )          |
| <b>OPERATING TEMP.</b> | -25°C...+50°C ( -13°F...122°F ) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.