
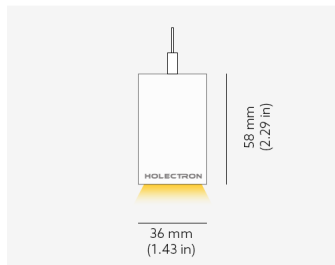
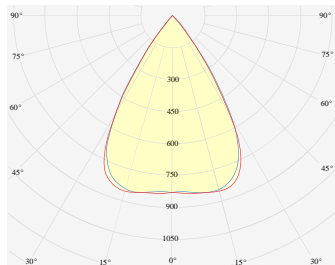


MINIAX MESH PENDANT

MiniaX.Mesh P MID PWE.BBK x.xxx B000 D065C W16 027 L1120 DA
EU / PH

MESH ASSEMBLY IDEAS

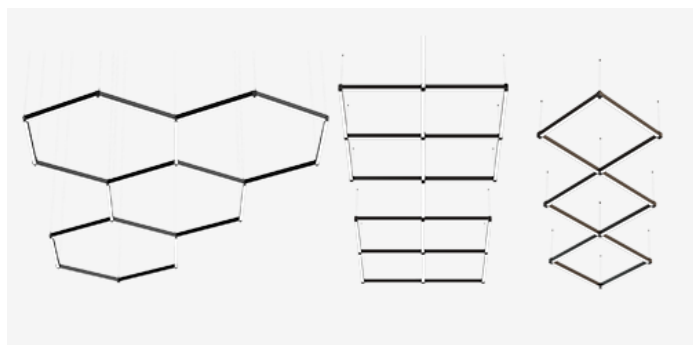

MOUNTING	Pendant
TYPE	White
CCT	2700K
CRI	CRI 95+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Luminaire: 1705 Lm Light Source: 1968 Lm
EFFICACY	Luminaire: 81 Lm/W Light Source: 94 Lm/W
LIFETIME	L90B10 60.000h

CONTROL	DALI
----------------	------

LUMINAIRE POWER	21.03 W
INPUT VOLTAGE	220-240 VAC 50/60 Hz Integrated driver

LIGHT DIFFUSION	65°
HOUSING	Housing Color: White Baffle Color: Baffle Black Blackout Color: No Blackout
IP CLASS	IP20 ingress protection
OTHER DETAILS	Suspension length 2m (6.5') Lead cable 2m (6.5'), transparent

DIMENSIONS	Width: 36 mm / 1.43" Height: 58 mm / 2.29" Length: 1120 mm / 1.12'
-------------------	--------------------------------------------------------------------------



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.