




## MINIAX MESH PENDANT

MiniaX.Mesh P MID PWE.BBK x.xxx B000 D065C W16 030 L1120 DA  
EU / PH

### MESH ASSEMBLY IDEAS

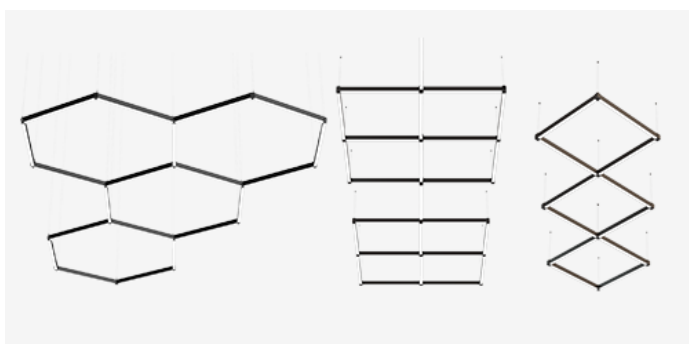

<b>MOUNTING</b>	Pendant
<b>TYPE</b>	White
<b>CCT</b>	3000K
<b>CRI</b>	CRI 95+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LUMINOUS FLUX</b>	Luminaire: 1743 Lm Light Source: 2012 Lm
<b>EFFICACY</b>	Luminaire: 83 Lm/W Light Source: 96 Lm/W
<b>LIFETIME</b>	L90B10 60.000h

<b>CONTROL</b>	DALI
----------------	------

<b>LUMINAIRE POWER</b>	21.03 W
<b>INPUT VOLTAGE</b>	220-240 VAC 50/60 Hz Integrated driver

<b>LIGHT DIFFUSION</b>	65°
<b>HOUSING</b>	Housing Color: White Baffle Color: Baffle Black Blackout Color: No Blackout
<b>IP CLASS</b>	IP20 ingress protection
<b>OTHER DETAILS</b>	Suspension length 2m (6.5') Lead cable 2m (6.5'), transparent

<b>DIMENSIONS</b>	Width: 36 mm / 1.43" Height: 58 mm / 2.29" Length: 1120 mm / 1.12'
-------------------	--------------------------------------------------------------------------



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.