





# AQUA

AquaG2 IE RWE.CLR / RGB48/Nx G5 011W L1000

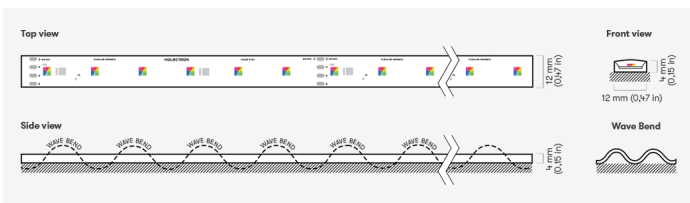

<b>TYPE</b>	RGB
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LEDs/M</b>	48 LEDs/m
<b>LUMINOUS FLUX</b>	Luminaire: 386 Lm/m Light Source: 480 Lm/m Red: 84 Lm/m Green: 247 Lm/m Blue: 55 Lm/m
<b>EFFICACY</b>	Luminaire: 34 Lm/W Light Source: 42 Lm/W
<b>LIFETIME</b>	L90B10 60.000 h

**CONTROL** Dimmable

**VOLTAGE** 24 VDC  
**WATTAGE** 11.52 W/m | 3.51 W/ft

**CUTTING STEP** 125 mm (4.92")  
**MAX RUN** 6.5 m (21')  
**OTHER DETAILS** IP67 protection

**TEMPERATURE** T<sub>c</sub> max <75°C ( 167°F )  
**OPERATING TEMP.** -25°C...+50°C ( -13°F...122°F )

**DIMENSIONS** Width: 12 mm (0.47")  
 Height: 4 mm (0.16")

**MOUNTING PROFILE** Polycarbonate  
 UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.