





AQUA

AquaG2 IE RWE.CLR / RGB96/Nx G5 011W L1000

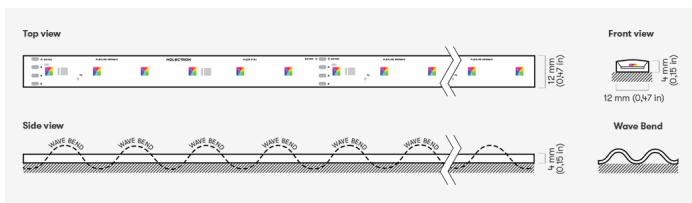

TYPE	RGB
COLOR CONSISTENCY	3-Step MacAdam
LEDs/M	96 LEDs/m
LUMINOUS FLUX	Luminaire: 385 Lm/m Light Source: 479 Lm/m Red: 84 Lm/m Green: 246 Lm/m Blue: 55 Lm/m
EFFICACY	Luminaire: 33 Lm/W Light Source: 42 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	11.52 W/m 3.51 W/ft

CUTTING STEP	62.5 mm (2.46")
MAX RUN	9.5 m (31')
OTHER DETAILS	IP67 protection

TEMPERATURE	T _c max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)

DIMENSIONS	Width: 12 mm (0.47") Height: 4 mm (0.16")
-------------------	--

MOUNTING PROFILE	Polycarbonate UV and Salt water resistant
-------------------------	--



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.