





AQUA

AquaG2 IE RWE.CLR / RGBW48/Nx G5 09W 830 L1000

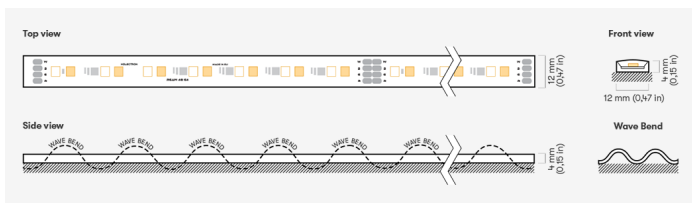

TYPE	RGBW
CCT	3000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Luminaire: 495 Lm/m Light Source: 616 Lm/m
EFFICACY	Luminaire: 52 Lm/W Light Source: 64 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL Dimmable

VOLTAGE 24 VDC
WATTAGE 9.6 W/m | 2.9 W/ft

CUTTING STEP 125 mm (4.92")
MAX RUN 8 m (26')
OTHER DETAILS IP67 protection

TEMPERATURE Tc max <75°C (167°F)
OPERATING TEMP. -25°C...+50°C (-13°F...122°F)

DIMENSIONS Width: 12 mm (0.47")
 Height: 4 mm (0.16")

MOUNTING PROFILE Polycarbonate
 UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.