





AQUA

AquaG2 IE RWE.CLR / TW56/Nx.24V G5 09W 820/835 L1000

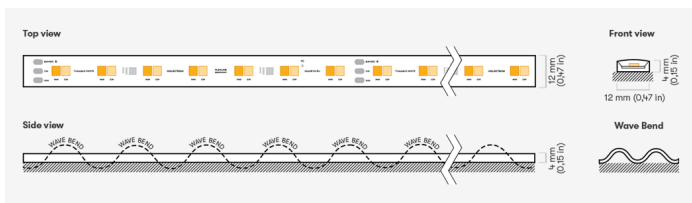

TYPE	Tunable white
CCT (WARM)	2000K
CRI (WARM)	CRI 80+
CCT (COLD)	3500K
CRI (COLD)	CRI 80+
LEDs/M	56 LEDs/m
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	999 Lm/m
EFFICACY	104 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL Dimmable

VOLTAGE 24 VDC
WATTAGE 9.6 W/m | 2.93 W/ft

CUTTING STEP 125 mm (4.92")
MAX RUN 8 m (26')
OTHER DETAILS IP67 protection

TEMPERATURE Tc max <75°C (167°F)
OPERATING TEMP. -25°C...+50°C (-13°F...122°F)

DIMENSIONS Width: 12 mm (0.47")
 Height: 4 mm (0.16")

MOUNTING PROFILE Polycarbonate
 UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.