





AQUA

AquaG2 IE RWE.CLR / TW56/Nx.24V G5 09W 820/840 L1000

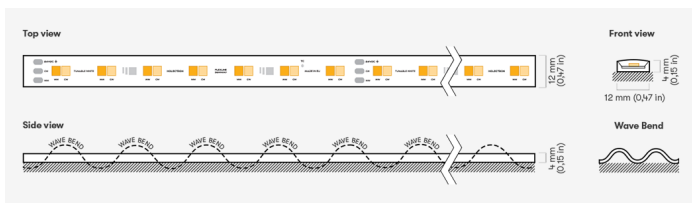

TYPE	Tunable white
CCT (WARM)	2000K
CRI (WARM)	CRI 80+
CCT (COLD)	4000K
CRI (COLD)	CRI 80+
LEDs/M	56 LEDs/m
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	1000 Lm/m
EFFICACY	104 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	9.6 W/m 2.93 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	8 m (26')
OTHER DETAILS	IP67 protection

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)

DIMENSIONS	Width: 12 mm (0.47") Height: 4 mm (0.16")
-------------------	----------------------------------------------

MOUNTING PROFILE	Polycarbonate UV and Salt water resistant
-------------------------	----------------------------------------------



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.