



# ATLANTIS G2 TOP

AtlantisG2Top IB RWE.EOP / TW2 112/Nx G5 09W 827 L1000

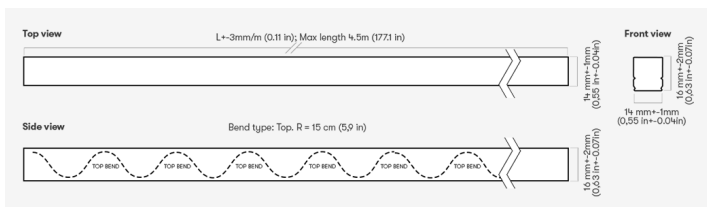

|                          |                         |
|--------------------------|-------------------------|
| <b>CCT</b>               | Warm: 2700K Cold: 5700K |
| <b>CRI</b>               | Warm: 80+ Cold: 80+     |
| <b>COLOR CONSISTENCY</b> | 3-Step MacAdam          |
| <b>LUMINOUS FLUX</b>     | 804 Lm/m (245 Lm/ft)    |
| <b>EFFICACY</b>          | 84 Lm/W                 |
| <b>LIFETIME</b>          | L90B10 60.000 h         |

|                |          |
|----------------|----------|
| <b>CONTROL</b> | Dimmable |
|----------------|----------|

|                |                     |
|----------------|---------------------|
| <b>VOLTAGE</b> | 24 VDC              |
| <b>WATTAGE</b> | 9.6 W/m   2.93 W/ft |

|                      |  |
|----------------------|--|
| <b>CUTTING STEP</b>  | 62.5 mm                                      |
| <b>OTHER DETAILS</b> | IP67 protection<br>Bend radius: 15 cm (5.9") |

|                        |                                 |
|------------------------|---------------------------------|
| <b>TEMPERATURE</b>     | Tc max <75°C ( 167°F )          |
| <b>OPERATING TEMP.</b> | -25°C...+50°C ( -13°F...122°F ) |

|                   |   |
|-------------------|---|
| <b>DIMENSIONS</b> | Width: 14 mm ±1mm (0.55" ±0.04")<br>Height: 16 mm ±2mm (0.63" ±0.07")<br>Length: up to 4.5m ±3mm/meter<br>(15"±0.11"/m) |
|-------------------|---|



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.