



PYTHON-03

Python03 RWE / RGBW48/NX G5 014W 827 L1000

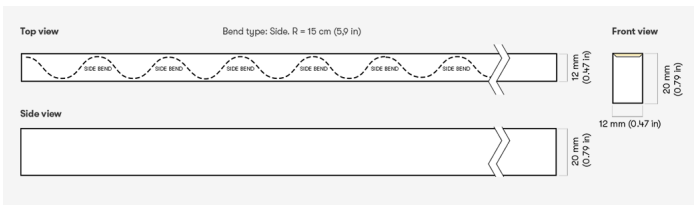

| | |
|--------------------------|---|
| LIGHT TYPE | RGBW |
| CCT | 2700K |
| CCT Shift | 2500K |
| CRI | CRI 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | 120° beam angle |
| LUMINOUS FLUX | Luminaire: 262 Lm/m Light source: 960 Lm/m |
| EFFICACY | Luminaire: 18 Lm/W Light source: 67 Lm/W |
| LIFETIME | L70B50 50.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|----------------------|
| VOLTAGE | 24V DC |
| WATTAGE | 14.4 W/m 4.39 W/ft |

| | |
|---------------------|---|
| CUTTING STEP | 125 mm (4.92") |
| MAX RUN | 7 m (23') |
| PACKING | 5m or customized length per reel |
| DIMENSIONS | Width: 20 mm (0.79") Height: 12 mm (0.47") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |
| STORAGE TEMP. | -25°C...+80°C (-13°F...176°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.