



PYTHON-03

Python03 RWE / RGBW48/NX G5 014W 850 L1000

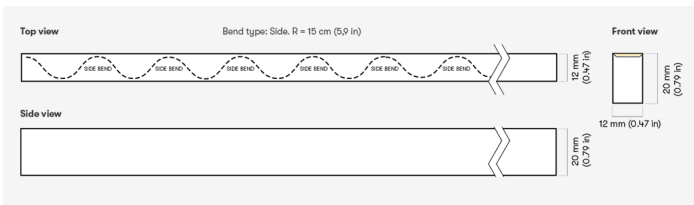

LIGHT TYPE	RGBW
CCT	5000K
CCT Shift	4200K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	Luminaire: 290 Lm/m Light source: 1060 Lm/m
EFFICACY	Luminaire: 20 Lm/W Light source: 74 Lm/W
LIFETIME	L70B50 50.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24V DC
WATTAGE	14.4 W/m 4.39 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	7 m (23')
PACKING	5m or customized length per reel
DIMENSIONS	Width: 20 mm (0.79") Height: 12 mm (0.47")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.