



# PYTHON-03

Python03 RWE / RGBW48/NX G5 014W 835 L1000

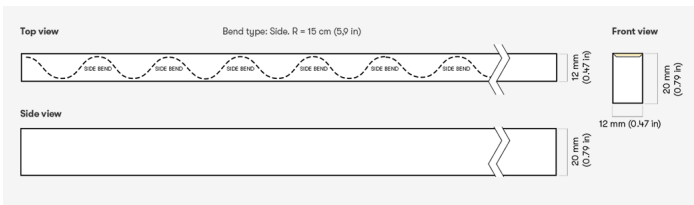

<b>LIGHT TYPE</b>	RGBW
<b>CCT</b>	3500K
<b>CCT Shift</b>	3100K
<b>CRI</b>	CRI 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>PHOTOMETRIC</b>	120° beam angle
<b>LUMINOUS FLUX</b>	Luminaire: 277 Lm/m Light source: 1012 Lm/m
<b>EFFICACY</b>	Luminaire: 19 Lm/W Light source: 70 Lm/W
<b>LIFETIME</b>	L70B50 50.000 h

<b>CONTROL</b>	Dimmable
----------------	----------

<b>VOLTAGE</b>	24V DC
<b>WATTAGE</b>	14.4 W/m   4.39 W/ft

<b>CUTTING STEP</b>	125 mm (4.92")
<b>MAX RUN</b>	7 m (23')
<b>PACKING</b>	5m or customized length per reel
<b>DIMENSIONS</b>	Width: 20 mm (0.79") Height: 12 mm (0.47")

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
<b>OPERATING TEMP.</b>	-25°C...+50°C ( -13°F...122°F )
<b>STORAGE TEMP.</b>	-25°C...+80°C ( -13°F...176°F )



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.